



200 watt



400 watt

Key Features

Efficacy: Up to 140 LPW

LED Brand: Philips

LED Driver: Meanwell

Beam Angle: 30°/60°/90°/80°*150°/Type III

IP Rated: IP66

Installation: Bracket

Warranty: 7 years

Product Certificate


CE, RoHS

Application


Shopping malls, exhibition halls, car parks, stadiums, billboards, parks, sculpture, building facades and other indoor and outdoor lighting.

Photometry


30°PC lens

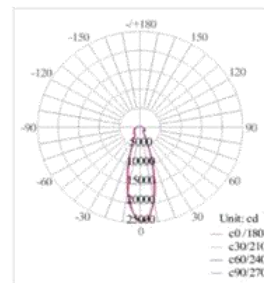


60°PC lens

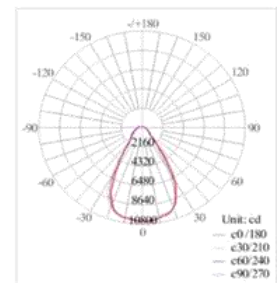


90°PC lens

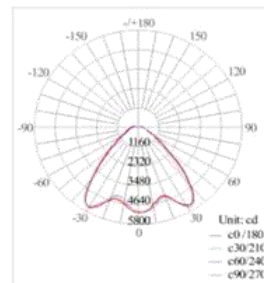

80°*150°PC lens

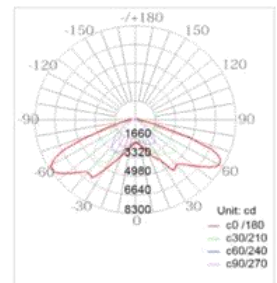

Type III PC lens

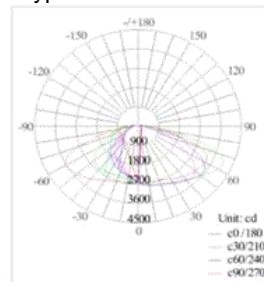

Product Specifications

SKU	MAS-FL-UF070	MAS-FL-UF100	MAS-FL-UF150	MAS-FL-UF200	MAS-FL-UF240	MAS-FL-UF300	MAS-FL-UF400
Watts	70W	100W	150W	200W	240W	300W	400W
Initial Luminous Flux (Test data by 5000K)	8,400 lm	14,000 lm	21,000 lm	28,000 lm	31,200 lm	42,000 lm	56,000 lm
Luminous Efficiency	140 lm/w						
Input Voltage	100-277 VAC						
Power Factor	>0.97						
LED Driver	Mean well						
LED Brand	Philips						
CCT	2700K to 6500K						
CRI	70+ /80+						
Housing Color	white/black/gray						
Housing Material	ADC12 Aluminum, PC						
Working Environment	-30°C to +55°C; 10% to 90% RH						
Lifespan	L80B10 50,000hrs						
Warranty	7 years						

Ordering Information

MAS

company name

FL

product name

UF

series


100 - 0

watts


TYPE

FL Flood Light Datasheet


Dimension (unit: mm)

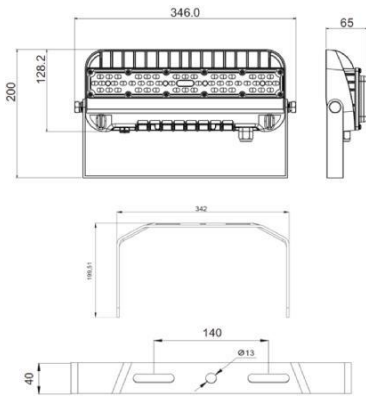


MAS-FL-UF070

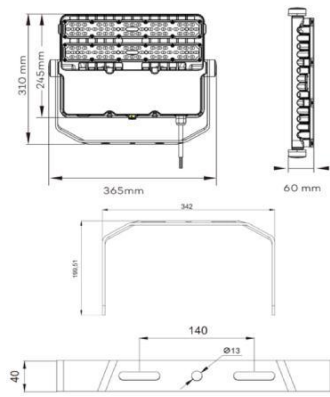


MAS-FL-UF100

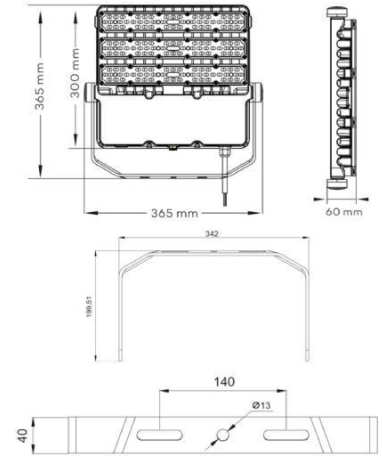


MAS-FL-UF150

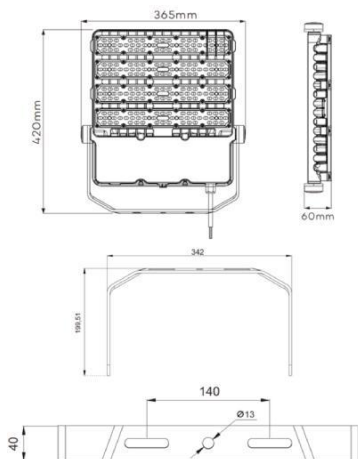

MAS-FL-UF200/MAS-FL-UF240

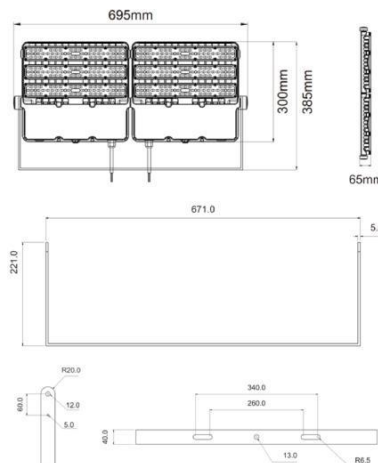

MAS-FL-UF300

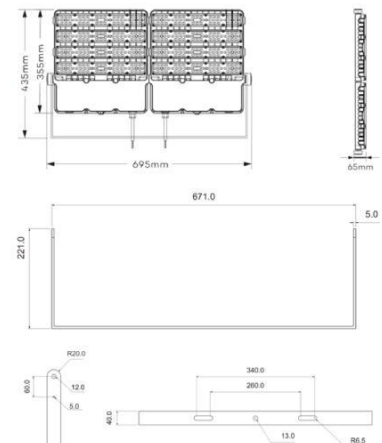

MAS-FL-UF400