

FL Flood Light Datasheet



Key Features

Efficacy: Up to 130 LPW

LED Brand: Philips

LED Driver: Mean Well

Beam Angle: 60°/90°/120°

IP Rated: IP66

Installation: Bracket

Warranty: 7 years

Product Certificate


CE, RoHS

Application


Shopping malls, exhibition halls, car parks, stadiums, stadiums, billboards,

Photometry


60° PC lens



90° PC lens



120° PC lens



FL Flood Light Datasheet

Product Specifications


SKU	MAS-FL-UF300	MAS-FL-UF400-
Watts	300W	400W
Initial Luminous Flux (Test data by 5000K)	42,000 lm	56,000 lm
Luminous Efficiency	130 lm/w	
Input Voltage	100-277 VAC	
Power Factor	>0.97	
LED Driver		
LED Brand		
CCT	2700K to 6500K	
CRI	70+ /80+	
Housing Color	Black / Gray	
Housing Material	ADC12 Die-Casting Aluminum, PC	
Working Environment	-30°C to +55°C;10% to 90% RH	
Lifespan	L80B10 50,000hrs	
Warranty	7 years	

Packing Information


SKU	PCS/CTN	Net Weight	Gross Weight	Dimension Weight	CBM
MAS-FL-UF300	1	8.2 kg	9.5 kg	8.0 kg	L645*W405*H115 mm ≈0.040 m ³
MAS-FL-UF400	1	8.5 kg	9.8 kg	8.0 kg	L645*W405*H115 mm ≈0.040 m ³

FL Flood Light Datasheet


Ordering Information

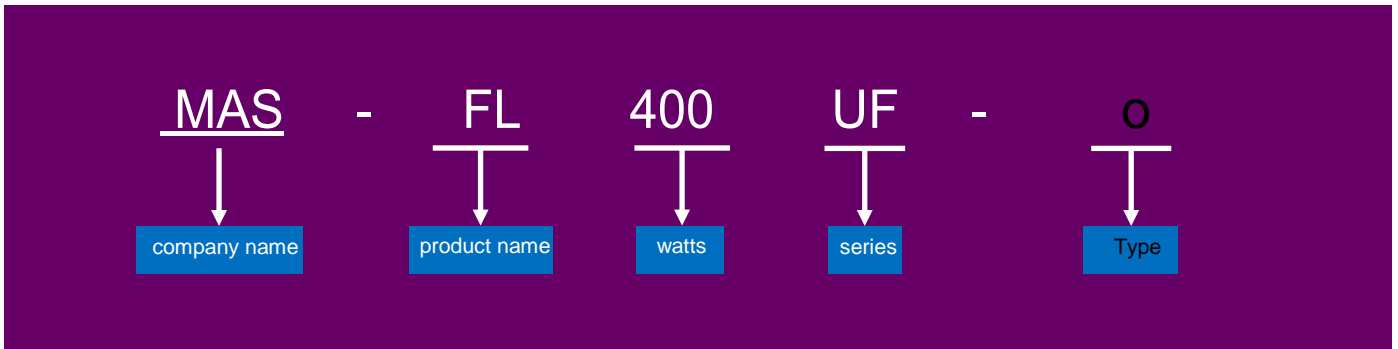

Dimension (unit: mm)

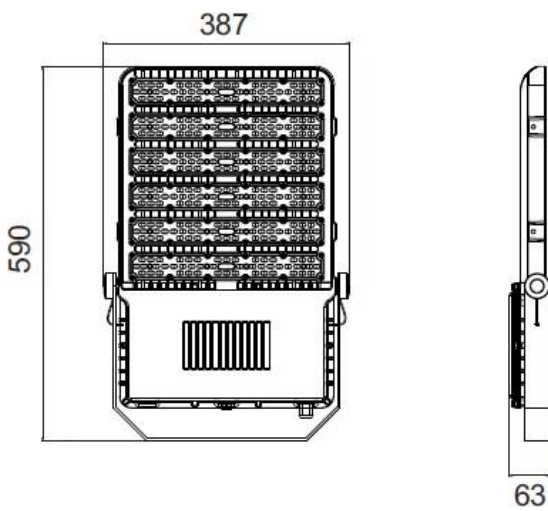

Packing Images

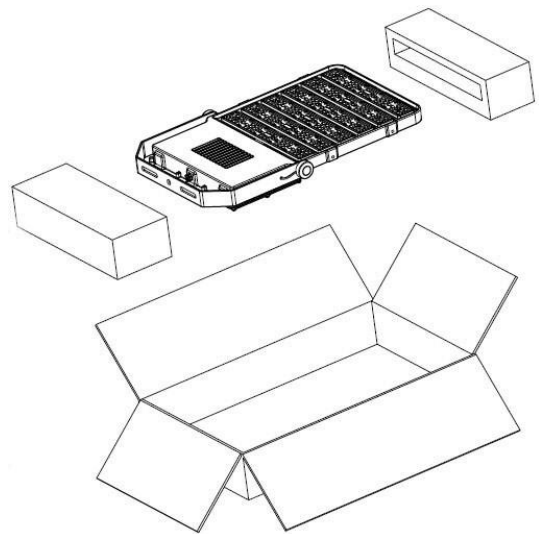

MAS-FL-UF300-O/
MAS-FL-UF400-O